


# Ecophon Focus<sup>TM</sup> E

Ecophon Focus<sup>TM</sup> E has a recessed visible grid and a tegular edge, creating a ceiling with a shadow effect that accentuates each tile and partially conceals the grid. For applications where an attractive suspended ceiling is required and easy removal of individual tiles is essential.



#### **SYSTEM RANGE**

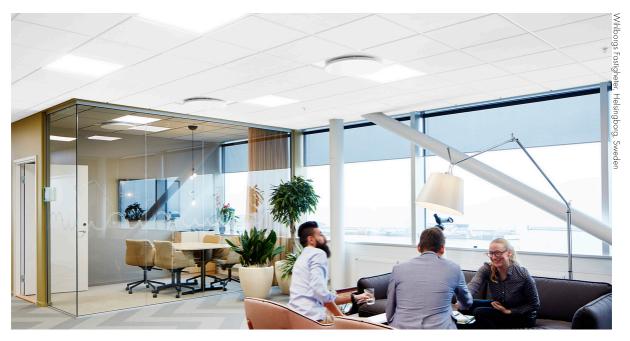

Size, mm	600x600	1200x600
Connect T24	•	•
Thickness	20	20

© Saint-Gobain Ecophon AB Ecophon Focus<sup>TM</sup> E, 2025-01-27











nect T24 Focus E with Connect Angle trim


#### Acoustic



## **Sound Absorption:**

Test results according to EN ISO 354. Classification according to EN ISO 11654, and the single value ratings for Noise Reduction Coefficient, NRC and Sound Absorption Average, SAA according to ASTM C 423.





Frequency Hz

- ···· Focus E 20 mm, 60 mm o.d.s.
- Focus E 20 mm, 200 mm o.d.s.
- o.d.s = overall depth of system

THK mm	o.d.s. mm	$lpha_{ m p}$ , Practical sound absorption coefficient					$\alpha_{_{\!\scriptscriptstyle{\mathrm{W}}}}$	Sound absorption class	
		125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	u <sub>w</sub>	Sound absorption class
20	60	0.15	0.55	0.90	1.00	1.00	1.00	0.85	В
20	200	0.50	0.90	0.90	0.90	1.00	1.00	0.95	А

THK mm	o.d.s. mm	NRC	SAA
20	60	0.90	0.87
20	400	0.85	0.85

THK	AC(1.5)	$D_{nfw}$	CAC dB
mm	Articulation Class, ASTM E1111, ASTM E1110	Weighted normalized flanking level difference, ISO 10848-2	Ceiling Attenuation Class, ASTM 1414, ASTM E413
20	180	22	23

# Indoor Air Quality



Certificate / Label	
Eurofins Indoor Air Comfort®	IAC Gold
French VOC	A+





#### **Material Health**



This product has received a C2C Certified Material Health Certificate $^{\text{TM}}$  at the Silver level (standard version 4.0). The C2C Certified Material Health Certificate $^{\text{TM}}$  is a verification of the health and safety of a product's composition using the Material Health requirements of the Cradle-to-Cradle Certified Product Standard.

© Saint-Gobain Ecophon AB Ecophon Focus<sup>TM</sup> E, 2025-01-27



# Cradle to Cradle Certified®



This product is Cradle to Cradle Certified® at Bronze level (version 4.0).



## **Carbon footprint**



kg CO2 equiv/m²		Life-cycle stages A1 to C4 from EPD, in conformity with IS 14025 / EN 15804
Focus E	3,66	14020 / 11110004



#### Circularity

Minimum post-consumer recycled content	55%
Recyclability	Fully recyclable



#### Fire safety

Country	Fire standard	Class	The glass wool core of the tiles is tested and classified as non-combustible according to EN ISO 1182.
Europe	EN 13501-1	A2-s1,d0	noreombosible according to ETV130-1102.



# **Humidity Resistance**

Class C, relative humidity 95% and 30°C, according to EN 13964:2014



#### Visual appearance

White Frost, nearest NCS colour sample S 0500-N, 85% light reflectance. Gloss < 1.



# Cleanability

Daily dusting and vacuum cleaning. Weekly wet wiping.



## Accessibility

The tiles are easily demountable. Minimum demounting depth according to installation diagrams.



#### Installation

Installed according to installation diagrams, installation guides and drawing aid. For information regarding minimum overall depth of system see quantity specification.



## System weight

	kg/m²	Weight information is indicative and subject to variation.
Focus E	2,0	

© Saint-Gobain Ecophon AB Ecophon Focus™ E, 2025-01-27

# S kg

## **Mechanical properties**

See table about Max live load and Min load bearing capacity and Functional demands, Mechanical properties at www.ecophon.com.



# CE

Ecophon ceiling systems are CE marked according to the European harmonized standard EN 13964:2014. CE marked construction products are covered by a Declaration of Performance (DOP) which enables customers and users to easily compare performance of products available on the European market.

© Saint-Gobain Ecophon AB Ecophon Focus<sup>TM</sup> E, 2025-01-27